



CorePro LEDcandle

CorePro LEDcandle ND 5.5-40W E14 840 B35 CL

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LED lamps deliver huge energy savings and minimize maintenance cost.

PHILIPS

Product data

• General Information

Cap-Base	E14 [E14]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5.5-40W

• Light Technical

Color Code	840 [CCT of 4000K (841)]
Luminous Flux (Nom)	520 lm
Luminous Flux (Rated) (Nom)	520 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	94.5 lm/W
Color Consistency	6 steps
Color Rendering Index (Nom)	80
Lmf At End Of Nominal Lifetime (Nom)	70 %

• Operating and Electrical

Input Frequency	50-60 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	40 W
Starting Time (Max)	0.5 s
Warm Up Time To 60% Light (Nom)	instant full light

Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V

• Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

• Controls and Dimming

Dimmable	No
----------	----

• Mechanical and Housing

Bulb Finish	Clear (CL)
-------------	------------


• Approval and Application

Suitable For Accent Lighting	No
Energy Efficiency Label (EEL)	A+

• Product Data

Full product code	871869654340500
Order product name	CorePro LEDcandle ND 5.5-40W E14 840 B35 CL
EAN/UPC - Product	8718696543405
Order code	929001206002
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001206002
Net Weight (Piece)	0.040 kg


Dimensional drawing

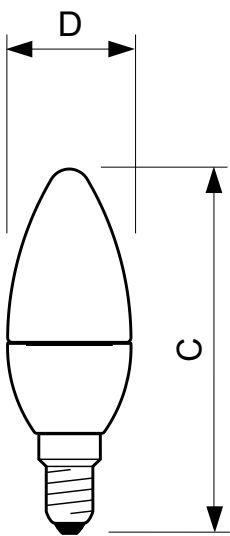

LED ND 5.5-40W E14 840 B35 CL

Product	D	C
CorePro LEDcandle ND 5.5-40W E14 840 B35 CL	35 mm	106 mm

Dimensional drawing



© 2016 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, February 2
data subject to change