



MASTER LEDtube InstantFit HF

MASTER LEDtube HF 1200mm UO 21W840 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. The MASTER LEDtube Performance is the ideal solution for customers which have higher light requirements and the want to maximize value over lifetime.(need the longest lifetime). Full energy savings and TCO benefits.

Product data

• General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Industrial
Nominal Lifetime (Nom)	50000 h
Switching Cycle B50L70	50000X 50000

• Light Technical

Color Code	840 [CCT of 4000K (841)]
Beam Angle (Nom)	160 °
Luminous Flux (Nom)	2500 lm
Luminous Flux (Rated) (Nom)	2500 lm
Rated Beam Angle	160 °
Correlated Color Temperature (Nom)	4000 K
Color Consistency	6 steps
Color Rendering Index (Nom)	83
Lmf At End Of Nominal Lifetime (Nom)	70 %

• Operating and Electrical

Input Frequency	25000/80000 Hz
Power (Rated) (Nom)	21 W
Lamp Current (Nom)	400 A
Starting Time (Max)	0.5 s
Warm Up Time To 60% Light (Max)	0.1 s
Power Factor (Min)	0.9
Voltage (Nom)	50-100 V

• Temperature

T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	45 °C

• Controls and Dimming

Dimmable	No
----------	----

• Mechanical and Housing

Product Length	1200 mm
----------------	---------

• Approval and Application

Energy Saving Product	Yes
Suitable For Accent Lighting	No
Energy Efficiency Label (EEL)	A+
Approval Marks	CE marking KEMA Keur certificate RoHS compliance VDE marking

• Product Data

Full product code	871869655278000
Order product name	MASTER LEDtube HF 1200mm UO 21W840 T8
EAN/UPC - Product	8718696552780


PHILIPS

MASTER LEDtube InstantFit HF

Order code 929001211102
Numerator - Quantity Per Pack 1
Numerator - Packs per outer box 10

Material Nr. (12NC) 929001211102
Net Weight (Piece) 0.360 kg


Dimensional drawing

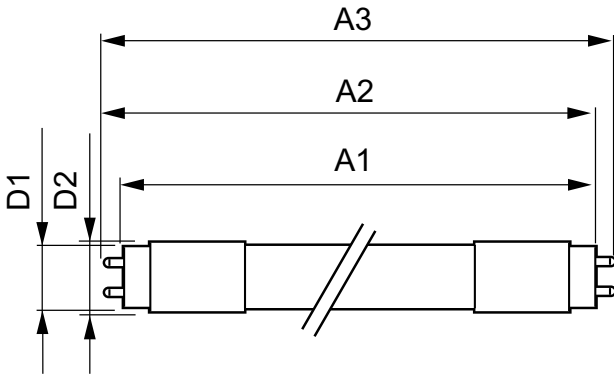


TLED 50-100V 20W-36W 2500lm 4000K G13 ND

Product	D1	D2	A1	A2	A3
MASTER LEDtube HF 1200mm UO 21W840 T8	25.68 mm	28 mm	1198.0 mm	1205.0 mm	1212.0 mm

Photometric data



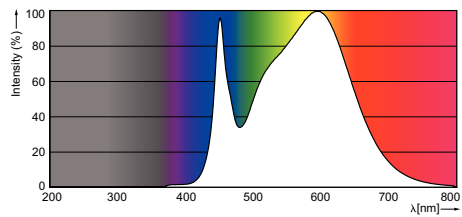

© 2016 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, February 4
data subject to change