

LEDINAIRE WT060C Waterproof



50Hz
60Hz

220V
240V

LIFE
L70B50
30K hrs




IP65




IK08







Ta
30 °C
-20 °C

850°



	System lumen	CCT	Driver	P(W)	A	
LEDINAIRE WT060C LED36S/840 PSU L1200	3600lm	4000K	PSU	40	1180	1,0
LEDINAIRE WT060C LED55S/840 PSU L1500	5500lm	4000K	PSU	60	1480	1,2

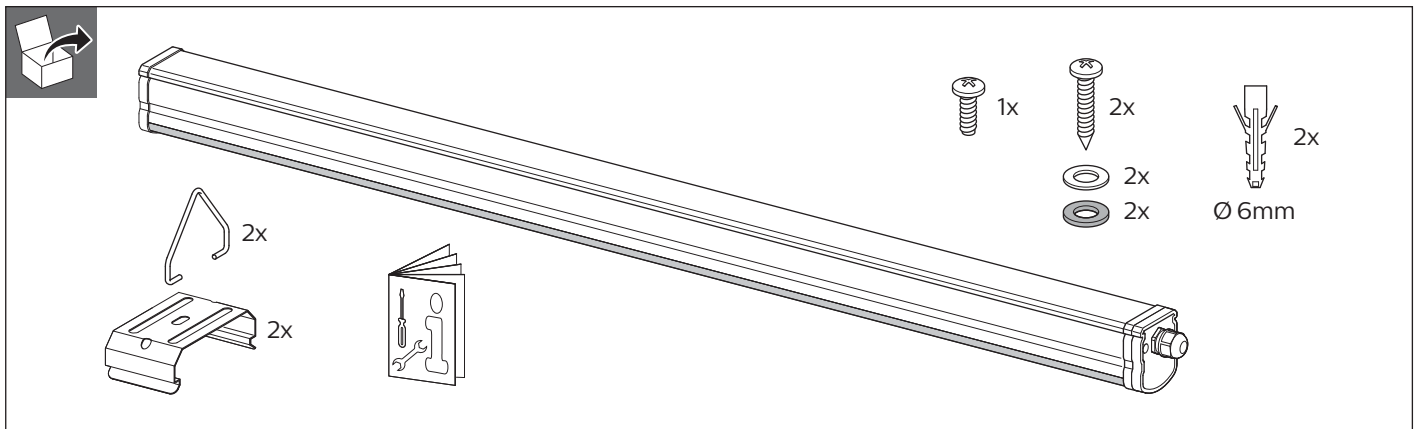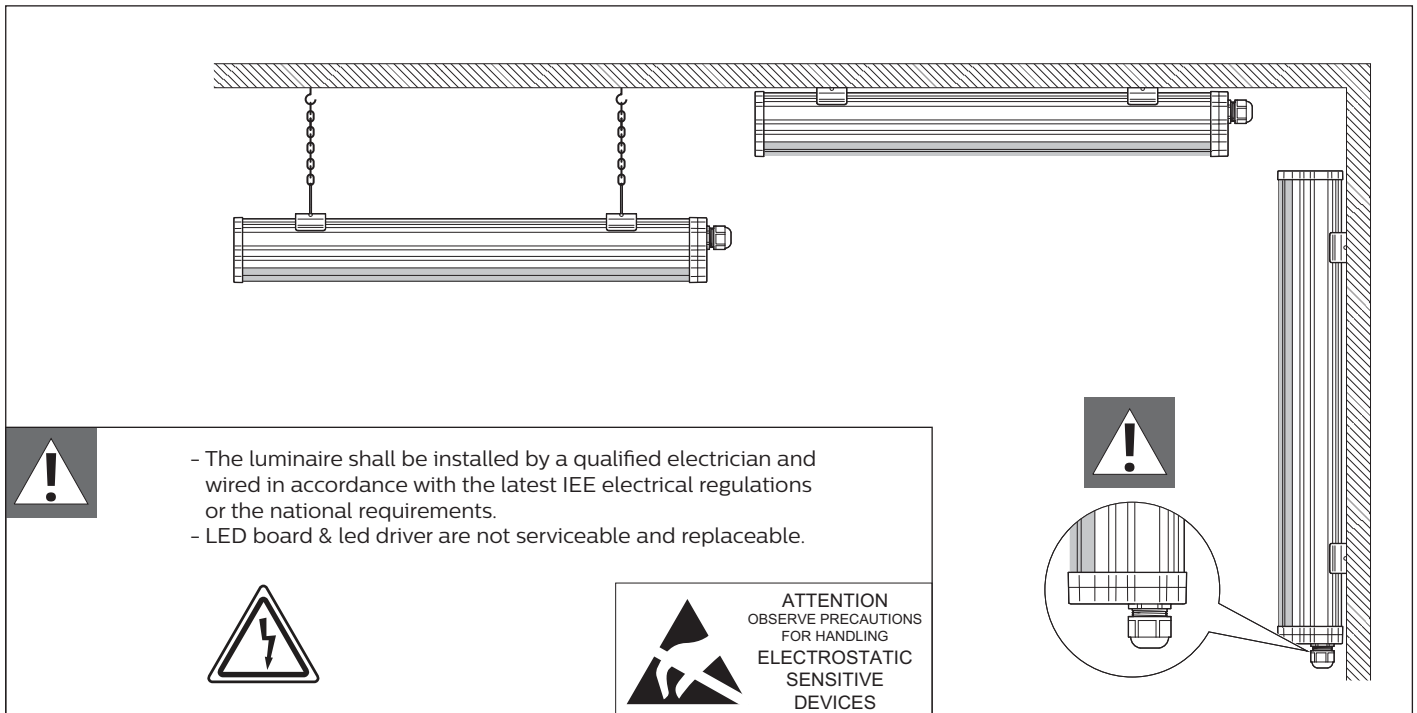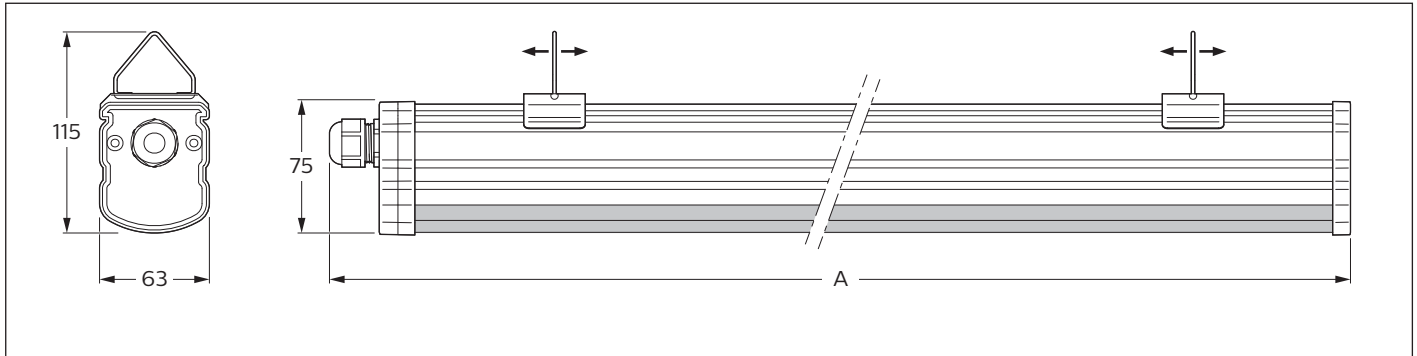

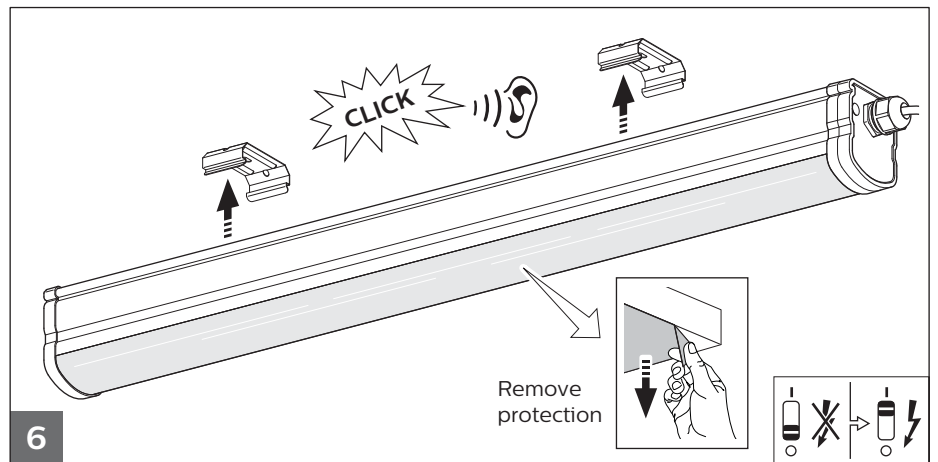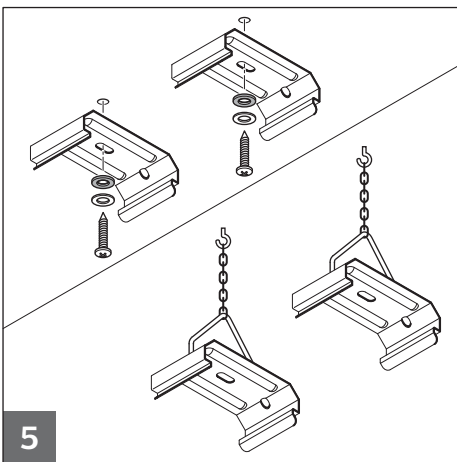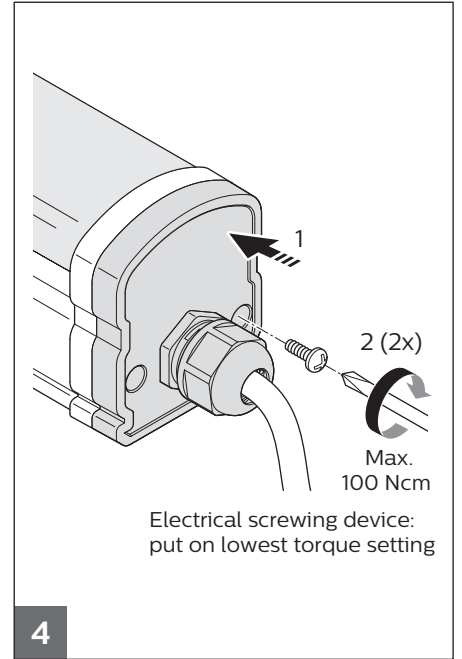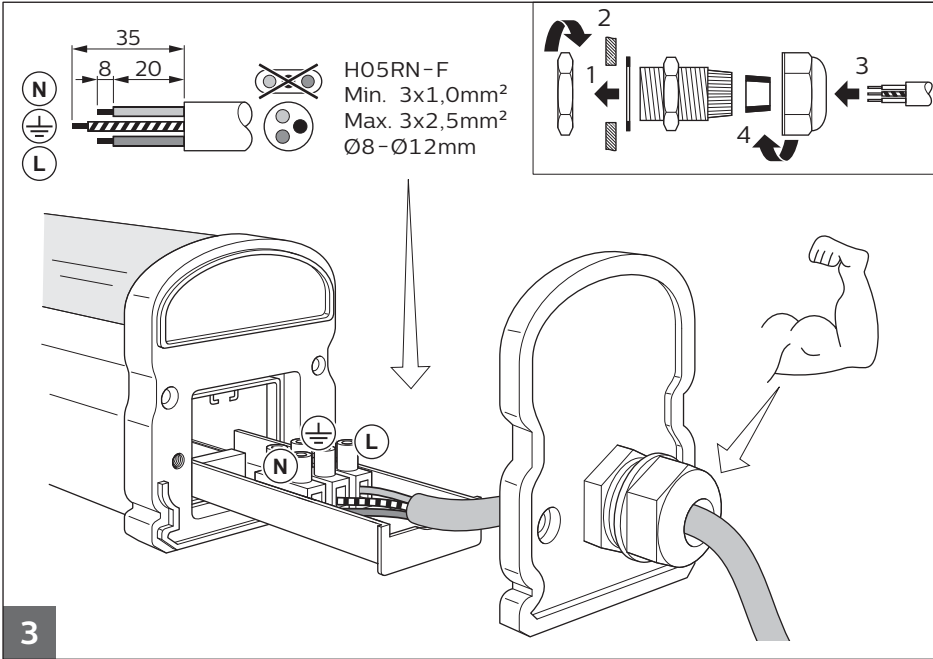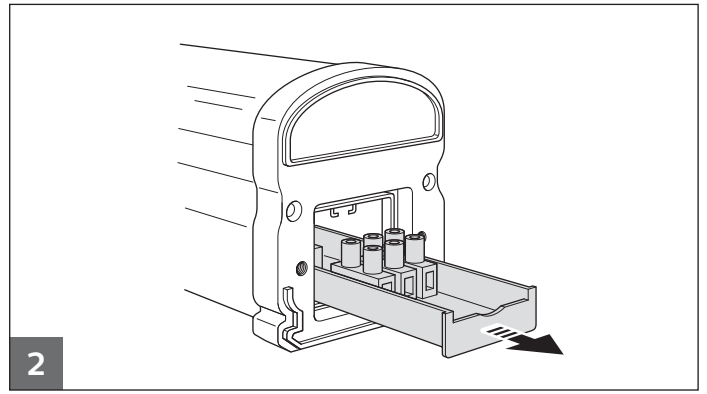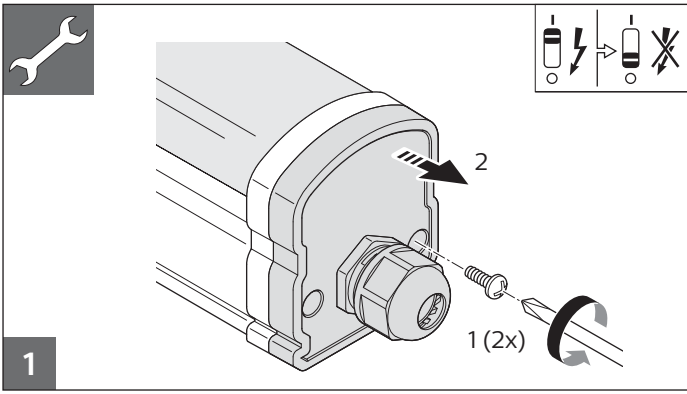

7

	LED36S	LED55S
	Electrical characteristics	
Inom(mA)	240	300
Imax.(A)	5,3	5,3
Tref(µs)	70	70
MCB	Luminaires Max.	
B-10A	15	15
B-16A	24	24
C-10A	24	24
C-16A	40	40

