

Batten

Designed for general lighting and cove lighting applications, the slim LEDINAIRE BN060C Batten is a cost-effective energy-saving LED solution.

Features

- One-lamp 1600lm and two-lamp 3200lm version available
- Philips CorePro LEDtube included (4000K)
- Light-line up to ten battens; mounting accessories included in box

Benefits

- Minimalistic, slim LED batten
- Long life, energy efficient
- Can be incorporated in a rigid or flexible light-line



Applications

- Rooms without specific lighting requirements
- Storage rooms
- Cove lighting


Product description	Light output (lm)	Power (W)	Weight	EOC
LEDINAIRE BN060C 1xTLED16/840 L1200	1600	18	0,410	07007999
LEDINAIRE BN060C 2xTLED16/840 L1200	3200	36	0,680	07009399

Operating temperature range	CCT (K)	Through wiring	Glow wire	Dimming	CRI	Safety class	Electrical connection	Input frequency
10 - 40	4000	yes	650	no	> 80	CL II	Power plug	50-60

Optical material	Efficacy	IK	Colour consistency	IP	PF	Housing colour	Lumen maintenance	Voltage	Housing material
Polykarbonát	80	02	5	20	0.9	WHITE	30,000	220-240	Aluminum


Dimensions

LEDINAIRE BN060C 2xTLED16/840 L1200

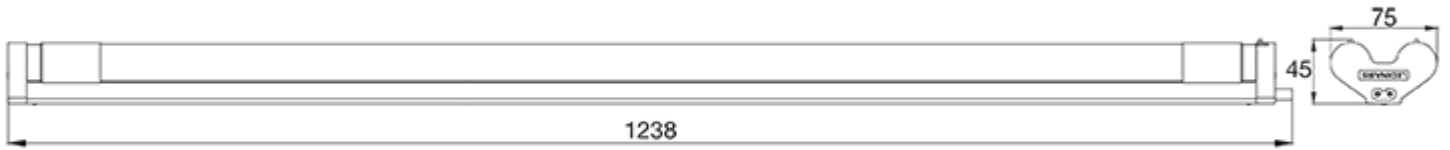

Photometric data

LEDINAIRE BN060C 2xTLED16/840 L1200

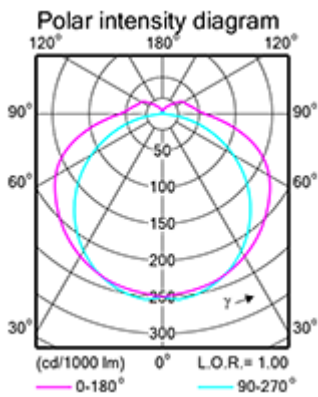

Energy efficiency label

