

Recessed

The LEDINAIRE RC060B is a professional recessed LED luminaire for the budget-conscious, offering modern design and delivering comfortable diffused lighting.

Features

- 3400 lm output
- 3000 K & 4000 K versions
- 600 mm x 600 mm & 300 mm x 1200 mm versions available

Benefits

- Energy efficient, professional luminaire for general lighting applications
- Recessed & Surface-mounted available
- Diffused comfortable light
- Modern, unobtrusive design

Applications

- Office (none-screen related work)
- Classrooms (none-screen related work)
- Corridors & circulation areas



Product description	Dimensions	Light output (lm)	CCT (K)	Weight	EOC
LEDINAIRE RC060B LED34S/840 PSU W60L60	600x600 mm	3400	4000	2,762	06958500
LEDINAIRE RC062B LED34S/840 PSU W62L62	625x625 mm	3400	4000	2,762	06964600
LEDINAIRE RC060B LED34S/840 PSU W30L120	300x1200 mm	3400	4000	2,500	06960800
LEDINAIRE RC060B LED34S/830 PSU W30L120	300x1200 mm	3400	3000	2,500	06961500
LEDINAIRE RC060B LED34S/840 PSU W60L60	600x600 mm	3400	4000	2,762	06958500



Operating temperature range	Through wiring	Glow wire	Dimming	Power (W)	CRI	Safety class	Electrical connection	Input frequency
10 - 40	yes	650	no	40	> 80	CL I	Push-in with pull-relief	50-60

Optical material	Efficacy	IK	Colour consistency	IP	PF	Housing colour	Lumen maintenance	Voltage	Housing material
PMMA	85	IK 03	5	IP 20	0.9	WHITE (RAL9003)	30,000	220-240	Painted steel

Dimensions


LEDINAIRE RC060B INCASSO W60L60 / W62L62

W60L60
W62L62

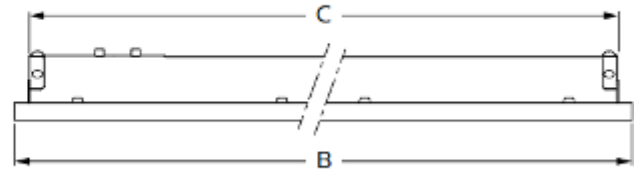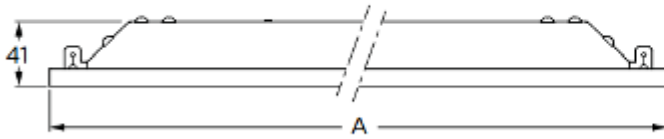

Photometric data

LEDINAIRE RC060B INCASSO W30L120 1xLED34S/840 PSU

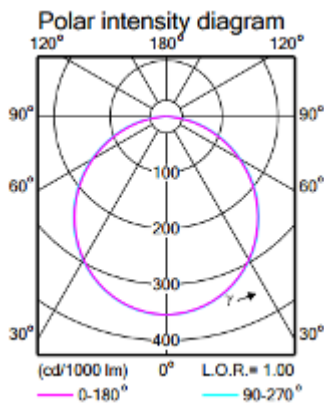

Energy efficiency label

