

Waterproof

The LEDINAIRE WT060C is an affordable, professional quality, waterproof LED luminaire for use in a multitude of project applications, for any budget.

Features

- IP65
- IK08
- 1200 mm & 1500 mm versions

Benefits

- Energy efficient and robust
- Minimalistic, co-extrusion design
- Diffused comfortable light
- Mounting bracket can be positioned over full length of luminaire

Applications

- Covered car parks
- Industry halls (up to 4m ceiling height)
- (Cold) storage rooms




Product description	Dimensions	Light output (lm)	Power (W)	Weight	EOC
LEDINAIRE WT060C LED36S/840 PSU L1200	L1200	3600	40	1,0	06965399
LEDINAIRE WT060C LED55S/840 PSU L1500	L1500	5500	60	1,2	06967799

Operating temperature range	CCT (K)	Through wiring	Glow wire	Dimming	CRI	Safety class	Electrical connection	Input frequency
-20 - +30	4000	no	650	no	> 80	CL I	Screw connection with M20 cable gland	50-60

Optical material	Efficacy	IK	Colour consistency	IP	PF	Housing colour	Lumen maintenance	Voltage	Housing material
PMMA	90	IK 08	5	IP 65	0.9	GREY (RAL7035)	30,000	220-240	Polycarbonate


Dimensions

LEDINAIRE WATERPROOF WT060C

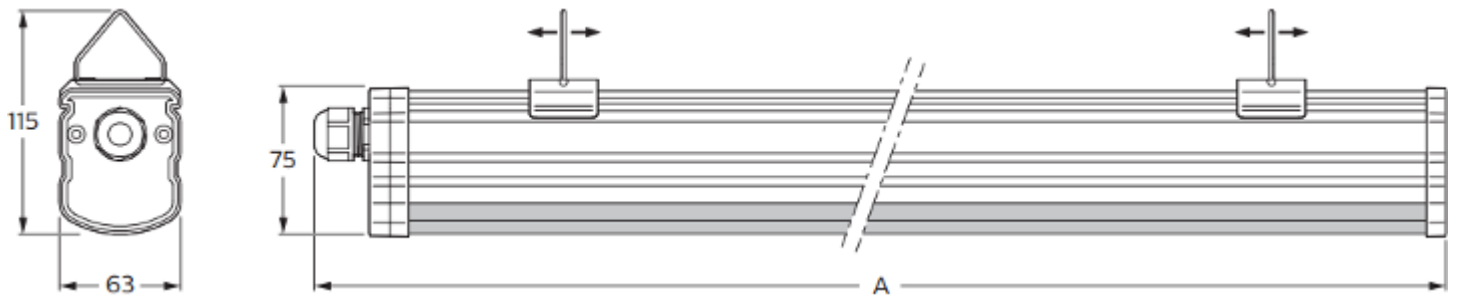

Photometric data

LEDINAIRE WATERPROOF WT060C

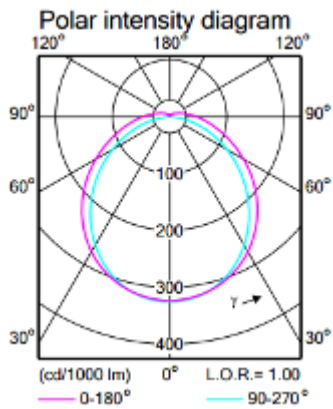

Energy efficiency label

